




SPEC-LINE SINKS THREE TUB CORNER w/DRAIN BOARD

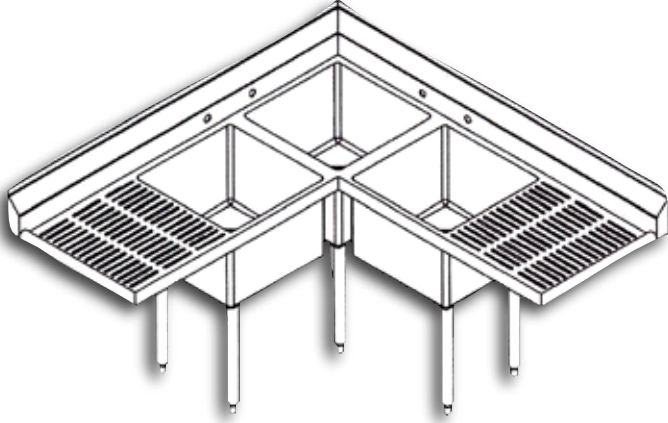

SPECIFICATIONS:

TOPS— 14-gauge, type 304 stainless steel, with integrally formed backsplash and sanitary roll on three sides. Backsplashes are pre-punched for required faucet holes. Drainboards are corrugated die-stamped (CDZ™ Corrugated Dry Zone) and pitched toward the sink. All joints are seam welded and all visible welds are ground smoothed and polished.

TUBS— 14-gauge, type 304 stainless steel with 3-1/2" die-stamped center drain openings. All vertical and horizontal corners minimal 5/8" radius cove. Tubs are integrally welded on tops.

LEGS— Removable 1-5/8" O.D. galvanized iron tubing legs with welded gussets and adjustable sanitary bullet-type feet. **Stainless steel legs and adjustable sanitary bullet-type feet available upon request.**

MECHANICAL:

- Water supply is 1/2" IPS Hot and Cold.
- Faucet holes are on standard 8" centers.
- Faucet height is 36-1/2" from floor.
- Waste drains are 1-1/2" IPS. Stainless Steel. 3-1/2" Basket drains are included.
- All dimensions are typical TOL ± .500

Faucets are not included


FEATURES:

- New **CDZ™ Corrugated Dry Zone**
- All one-piece welded construction
- Radius die-stamped tub bottom for better drainage
- All drainboards have integral backsplashes
- Gussets located on sink and tubs for greater support
- Turned up backsplash
- Tubs with a depth of 14", 16" and 18" are available upon request

CUSTOM SINKS

AVAILABLE UPON REQUEST!

CORRUGATED DRY ZONE™




MEETS OR EXCEEDS ALL HEALTH STANDARDS

REDUCES BACTERIA AND ODOR


ALLOWS AIR AND WATER TO FLOW UNDER ALL WASHABLE ITEMS ELIMINATING SUCTION AND CROSS-CONTAMINATION.



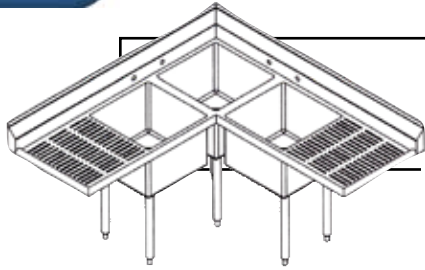


SPEC-LINE SCHEMATICS


THREE TUB CORNER / WITH DRAINBOARD

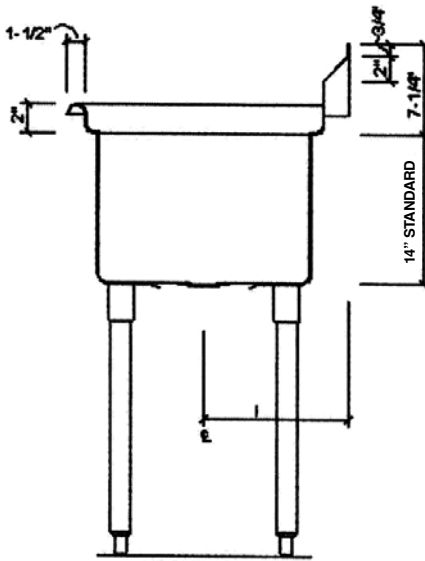

SECTION VIEW

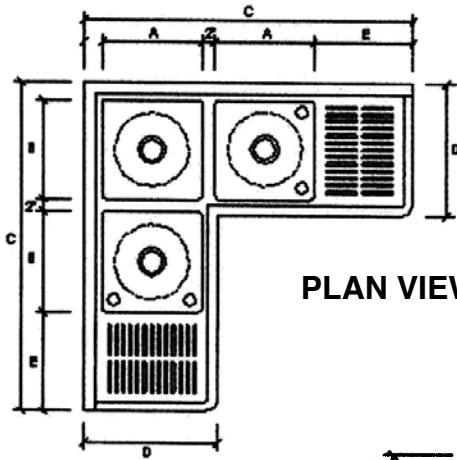

PLAN VIEW

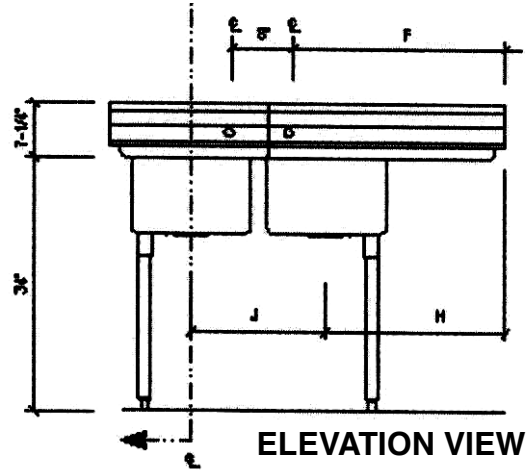

ELEVATION VIEW

3-TUB CORNER WITH DRAINBOARD

| MODEL | WEIGHT | A | B | C | D | E | F | G | H | I | J |
|---------------------|----------|-----|-----|-----|------|-----|-----|-----|------|------|-----|
| SL-3-LIN-LC-12-2D12 | 100 LBS. | 12" | 12" | 41" | 17½" | 12" | 21" | N/A | 18" | 9" | 14" |
| SL-3-LIN-LC-12-2D18 | 105 LBS. | 12" | 12" | 47" | 17½" | 18" | 27" | N/A | 24" | 9" | 14" |
| SL-3-LIN-LC-12-2D20 | 110 LBS. | 12" | 12" | 49" | 17½" | 20" | 29" | N/A | 26" | 9" | 14" |
| SL-3-LIN-LC-12-2D24 | 115 LBS. | 12" | 12" | 53" | 17½" | 24" | 33" | N/A | 30" | 9" | 14" |
| SL-3-LIN-LC-17-2D18 | 130 LBS. | 17" | 17" | 57" | 22½" | 18" | 32" | N/A | 26½" | 11½" | 19" |
| SL-3-LIN-LC-20-2D20 | 160 LBS. | 20" | 20" | 65" | 25½" | 20" | 37" | N/A | 30" | 13" | 22" |
| SL-3-LIN-LC-23-2D24 | 180 LBS. | 23" | 23" | 75" | 24½" | 24" | 44" | N/A | 35½" | 14½" | 25" |

